
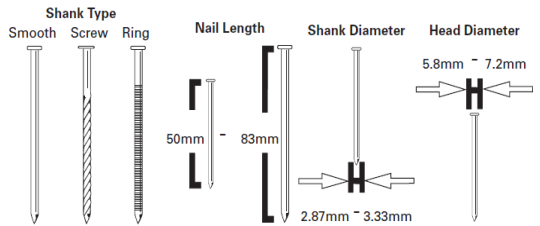


# DATASHEET

## Framing nailer SRN9021

| SRN9021 Framing nailer  |  |        |          |       |             |      |            |
|---|--|--------|----------|-------|-------------|------|------------|
|                                   | <b>FEATURES</b> <ul style="list-style-type: none"> <li>* Powerful</li> <li>* Big load capacity</li> <li>* Comfortable rubber grip</li> </ul>   |        |          |       |             |      |            |
|   | <b>APPLICATIONS</b> <ul style="list-style-type: none"> <li>* Floor and wall framing</li> <li>* Window build-up</li> <li>* Wall sheathing</li> <li>* Roofing</li> </ul>                                       |        |          |       |             |      |            |
| SPECIFICATIONS  |  |        |          |       |             |      |            |
| Weight<br>Dimensions<br>Load capacity<br>Maximum allowable pressure<br>Recommended pressure range<br>Actuation mode | 3.59 kg<br>554 x 108 x 340 mm<br>64~70 nails<br>8.3bar<br>5bar to 7bar<br>Contact /Sequential actuation  |        |          |       |             |      |            |
| FASTENERS   |  |        |          |       |             |      |            |
|                                  | 21° plastic collated strip nails<br><br><table border="1"> <tr> <td>Length</td> <td>50~83 mm</td> </tr> <tr> <td>Shank</td> <td>2.8~3.33 mm</td> </tr> <tr> <td>Head</td> <td>5.8~7.2 mm</td> </tr> </table> | Length | 50~83 mm | Shank | 2.8~3.33 mm | Head | 5.8~7.2 mm |
| Length  | 50~83 mm   |        |          |       |             |      |            |
| Shank   | 2.8~3.33 mm  |        |          |       |             |      |            |
| Head  | 5.8~7.2 mm   |        |          |       |             |      |            |