
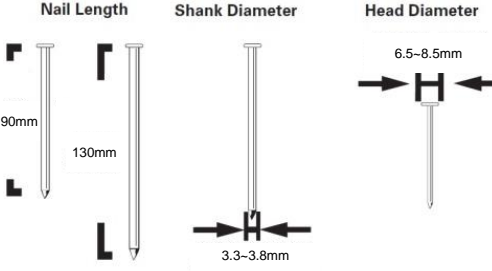


# DATASHEET

## Coil Nailer CN130

CN130 Coil Nailer							
	<b>FEATURES</b> <ul style="list-style-type: none"> <li>* One of the most powerful tools in its class, able to countersink nails into hard wood</li> <li>* Built-in silencer to reduce noise</li> <li>* Comfortable rubber grip</li> <li>* Downwards exhaust</li> <li>* Extra handle for better handling and user comfort</li> </ul>						
	<b>APPLICATIONS</b> <ul style="list-style-type: none"> <li>* Pallets, drums and export wooden boxes</li> <li>* Crating</li> <li>* Wooden fence</li> <li>* General construction applications</li> </ul>						
SPECIFICATIONS							
Weight Dimensions Load capacity Maximum allowable pressure Recommended pressure range Actuation mode	6.1 kg 320 x 120 x 480 mm 225 nails 8.3 bar 6~8.3 bar Contact actuation						
FASTENERS							
Nail Length Shank Diameter Head Diameter	15° flat wire welded coil nails						
	<table border="1"> <tr> <td>Length</td> <td>90~130 mm</td> </tr> <tr> <td>Shank</td> <td>3.3~3.8 mm</td> </tr> <tr> <td>Head</td> <td>6.5~8.5 mm</td> </tr> </table>	Length	90~130 mm	Shank	3.3~3.8 mm	Head	6.5~8.5 mm
Length	90~130 mm						
Shank	3.3~3.8 mm						
Head	6.5~8.5 mm						