
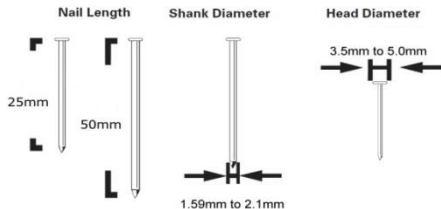


# DATASHEET

## Coil nailer CN45A

CN45A Coil nailer	
	<b>FEATURES</b> <ul style="list-style-type: none"> <li>* Light weight</li> <li>* Anti-double fire trigger. No adjustment to the tool is required to switch between bump fire and single fire mode.</li> <li>* Depth control dial, nail depth is easily adjusted</li> <li>* Plastic carrying case included</li> <li>* Drives both conical wire welded and plastic sheet collated nails without any adjustment</li> </ul>
	<b>APPLICATIONS</b> <ul style="list-style-type: none"> <li>* Sub-flooring</li> <li>* Fencing</li> <li>* Wall sheathing and roof sheathing</li> <li>* Fastening gypsum board, decorative board and other interior boards</li> </ul>
SPECIFICATIONS	
Weight Dimensions Load capacity  Maximum allowable pressure Recommended pressure range Actuation mode	1.60 kg 248 x 108 x 260 mm 400 nails (conical wire welded nails) 200 nails (plastic sheet collated nails)  8.3bar 5~7 bar Contact/Single-sequential actuation
FASTENERS	
	15° conical wire welded nails and flat plastic sheet collated nails
Length Shank Head	25~50 mm 1.59~2.1 mm 3.5~5.0 mm